



# Amika

## undercounter and pass through dishwashers



50 XL



51 XL & 55 XL WSD



80 XL, 91 XL  
& 95 XL WSD  
(91 XL model shown  
with soft touch controls)

- 1 year warranty
- Halcyon Amika models ruggedly built with simple controls
- 55 XL WSD with internal automatic water softener
- 95 XL WSD with internal automatic water softener
- Large three button controls on 50 XL
- Simple soft touch wipe clean controls on 51 XL, 55 XL WSD, 80 XL, 91 XL & 95 XL WSD
- All models fitted as standard with precise control peristaltic detergent and rinse aid dosing
- Drain pump as standard on 55 XL WSD & 95 XL WSD, optional on all other models
- Surface scrap trays standard on 91 XL & 95 XL WSD
- Surface scrap trays optional on 50 XL, 51 XL, 55 XL WSD & 80 XL
- 51 XL, 55 XL WSD, 91 XL & 95 XL WSD with internal breaktank as standard

### Technical

- Standard voltage 240V – single phase
- All models can be supplied for 3 phase operation
- Suitable for hot (max 50°C) or cold\* water supply at 2 to 4 bar dynamic pressure
- Wash temperature – 60°C
- Rinse temperature – 80°C except 50 XL – 65°C

\*Machines fitted to cold water supplies will not be capable of running repeated short cycles, the cycle time will automatically be extended to allow recovery of correct operating temperatures.


Model	Rack size mm	Useable Height mm	Dimensions mm W x D x H	Cycle Time Sec	Power kW	Amps Required	Price
AM 50 XL	500	325	580 x 605 x 815#	90/150	2.6/4.5/6.5	13/20/30###	
AM 50 XLD		As AM 50 XL above with fitted drain pump					
AM 51 XL	500	325	580 x 605 x 815#	90/150	2.6/4.5/6.5	13/20/30###	
AM 51 XLD		As AM 51 XL above with fitted drain pump					
AM 55 XL WSD	500	325	580 x 605 x 815#	90/150	2.6/4.5/6.5	13/20/30###	
		AM 55 XL WSD supplied with drain pump as standard					
AM 80 XL	500	380	640 x 740 x 1450##	110/180	4.5/6.5	20/30###	
AM 80 XLD		As AM 80 XL above with fitted drain pump					
AM 91 XL	500	380	640 x 740 x 1450##	110/180	4.5/6.5	20/30###	
AM 91 XLD		As AM 91 XL above with fitted drain pump					
AM 95 XL WSD	500	380	640 x 740 x 1450##	90/120/180	4.5/6.5	20/30###	
		AM 95 XL WSD supplied with fitted drain pump as standard					

# Height excludes feet which add 10 to 20mm.

## Height adjustable from 1450 to 1510mm.

### Machines will be supplied for 30 amp supply as standard, if 13 or 20 amp ordered they will be supplied with original cable and without plug. Standard 13 amp UK 3 pin plugs will be **unsuitable** for cable supplied.

**It is strongly recommended that for busy sites to achieve optimum performance that machines are installed on hot fill (max 50°C).**

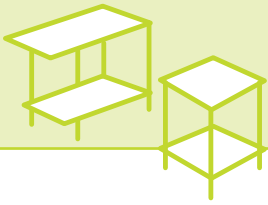

# Amika | tabling

Stainless steel scrap bin c/w castors and lid



704002

Closed end table c/w undershelf.  
700mm long, 615mm deep



717000

Closed end table c/w splashback and undershelf. 700mm long. (Right hand as illustrated)



80201 (Left hand)

80200 (Right hand)

Closed end table c/w splashback and undershelf. 1200mm long. (Right hand as illustrated)



80203 (Left hand)

80204 (Right hand)

Closed end table c/w splashback, undershelf and sink. 1200mm long. (Right hand as illustrated)



80205 (Left hand)

80206 (Right hand)

Closed end table c/w splashback, short undershelf, sink and scrap hole. 1200mm long supplied with rubber scrap hole protection ring. (Right hand as illustrated)



80207 (Left hand)

80208 (Right hand)

- All tabling is suitable for 500 x 500mm racks
- Supplied flat packed for easy assembly
- Available left or right hand arrangement – must be specified
- All legs supplied with height adjustable feet


- Tables including sinks have single 3/4" hole for **monoblock** spray arm and 1 1/2" waste
- All sinks are 500mm wide x 400mm front to back x 250mm deep
- All tables with splashback are 745mm deep

Item	Description	Part No.	Price
<b>Pre-wash Spray Arms</b>	Pre-wash spray arm: <b>Monoblock</b> spray arm – hot & cold	<b>Z600100</b>	
	Pre-wash spray arm: <b>Monoblock</b> spray arm – hot & cold with stem tap	<b>Z600105</b>	
	Pre-wash spray arm: <b>Twin pillar</b> spray arm – hot & cold	<b>Z600200</b>	
	Pre-wash spray arm: <b>Twin pillar</b> spray arm – hot & cold with stem tap	<b>Z600205</b>	



Pre-wash spray arm:  
**Monoblock** spray arm – hot & cold water feed with stem tap

Z600105

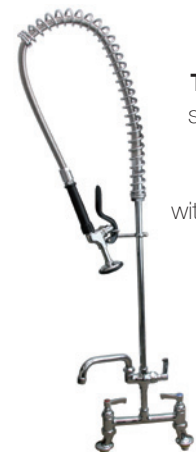

Pre-wash spray arm:  
**Twin pillar** spray arm – hot & cold water feed with stem tap