



PMR24

**Key Features:**

- Stainless Steel Interior & Exterior
- Designed To Operate In 43°C Ambient
- Built-In Air Rear Duct For Even Temperature Distribution
- R134a Refrigerant - Refrigerator
- Zero ODP Injected Polyurethane Insulation - 60mm
- 2 / +4°C Refrigerator Temperature Range
- Electronic Controller With Easy Read LCD Screen
- Hot Gas Defrost - Refrigerator
- Door Locks Fitted As Standard
- Rifle Bore Coated Evaporators - Refrigerator
- Ergonomic Flush Door Handle
- Gastronorm Shelving System - Anti Tilt Slides
- Hi / Lo Audio Visual Temperature Alarms
- Condensing Unit Safety System To Protect Compressor From Blocked Condensers
- Safety Cut Out Switch On Heated Model
- Heavy Duty Brake & Swivel Castors
- Flush Manoeuvring Handles -Protective Bumper Bars

Precision's durable all stainless steel Gastronorm mobile banquet carts have been designed to provide energy efficient and reliable mobile refrigerated and heated storage solutions for commercial kitchens all around the world.

The refrigerator model is designed to operate between -2°C and +4°C and is capable of storing 24 x GN1/1 65mm deep pans of refrigerated product.


The heated model operates between 78°C and 82°C to provide storage of 30 x GN1/1 65mm deep pans of pre-cooked food product. A humidity tray is also fitted as standard to increase the humidity within the cabinet when required.



PMH30

**Options:**

- Nylon Coated Shelves - GN2/1 - PMR Only
- Stainless Steel Shelves - GN2/1
- Nylon Coated Shelves - GN1/1 - PMR Only
- Stainless Steel Shelves - GN1/1
- 
- 
-

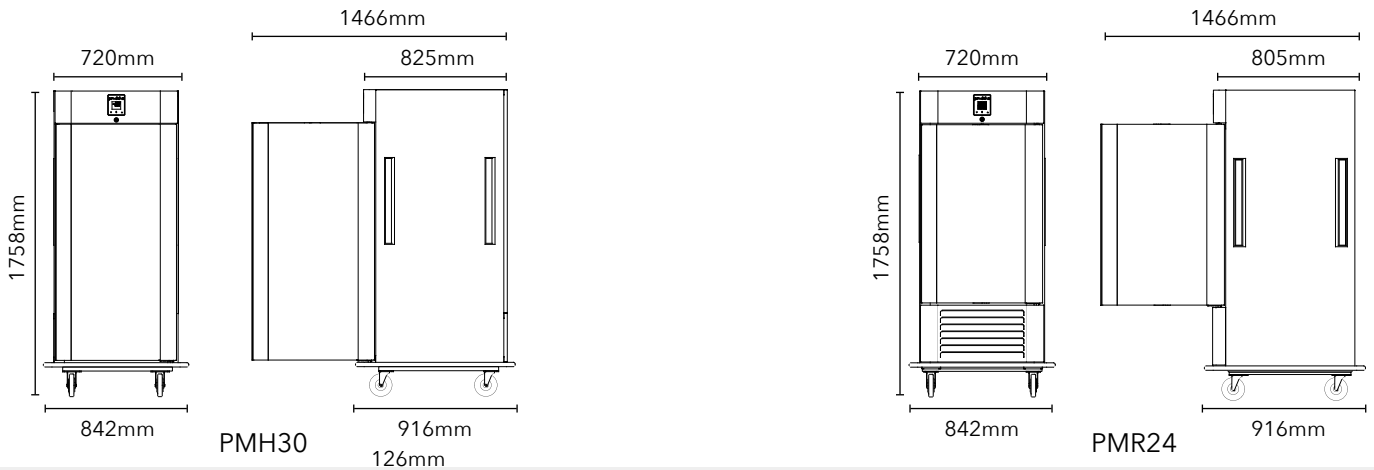

Model	PMR24	PMH30
Type	Refrigerator	Heated Storage
Material	ST/ST Int/Ext	ST/ST Int/Ext
Tray Size	GN2/1	GN2/1
Pairs of Tray Slides Supplied	12	15
Max Number of Trays (80mm Spacing)	24 x GN1/1	30 x GN1/1
Temperature Range	-2 / +4°C	78 / 82°C
Exterior WxDxH (mm)	842x916x1758	842x916x1758
Net Usable Volume (litres)	282	418
Weight (KG)	155	135
Refrigerant / GWP	R134a / 1430	N/A
Refrigeration Watts (+45°C Condensing)	412	N/A
Evaporating Temp	-10°C	N/A
Heat Rejection Watts	618	N/A
Noise Output (dBa)	77	72
Power	230 / 50 / 1	230 / 50 / 1
Running Current	3.4	9.5
Energy Consumption / 24hrs - kWh*	1.42	N/A
Energy Consumption / Year (AEC) - kWh*	518	N/A
Energy Efficiency Class*	C	N/A

\*Tested to prEN16825 Ecodesign Climate Test Class 4 - M1 Classification Test for Refrigerators / L1 Classification Test for Freezers

We are constantly innovating and improving our products. Please always check our website for the most up-to-date version of this spec sheet