



Dishwasher P-50B 230/50/1 DD (with drain pump)

500X500MM. RACKS. MAX. LOADING HEIGHT: 330MM.

Professional Washing with Total Guarantee.

- User-friendly.
- Optimal washing results.
- Sturdy and reliable.
- Stainless steel, sturdy and resistant washing arms. Don't get damaged because of chemical corrosion.
- 2.5 kW tank element: optimal recovery time.

- For washing glasses, cups, cutlery and small plates.
- Washing with double system of rotating dispersers (top and bottom).
- 1 wash cycle.
- Manufactured from catering grade AISI 304 2B stainless steel and incorporating top quality components.
- Double skinned door with high efficiency seal, ensuring thermal and acoustic insulation. Magnetic door micro-switch.
- Precision positioned water jets guarantee optimum washing result for even the most stubbornly stained glasses. Easy to assemble, boltless rinse spray arms.
- Inside of the machine with rounded finished: absence of angles avoiding the accumulation of dirt.
- Automatic detergent and rinse aid dosing equipment.
- Sammic ware washers are designed for easy and fast on-site maintenance.
- 100% tested.

PLEASE NOTE:

Boiler: 2.800W / Total power: 3.170W up to March 2017
 Boiler: 2.500W / Total power: 2.870W from March 2017




2006/95/EC, 2004/108/EC

UNE-EN 60335-2-58:1998+A1:99, UNE-EN 60335-1:1997
 UNE-EN 55014-1:2002, UNE-EN 61000-2-3:2001
 UNE-EN 61000-3-3:1997+C:99, UNE-EN 55014-2:1998



Dishwasher P-50B 230/50/1 DD (with drain pump)

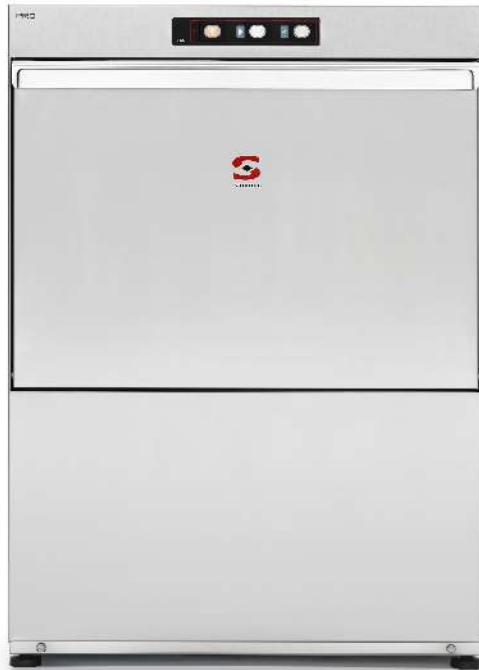

TECHNICAL SPECIFICATIONS

Basket dimensions: 500 mm x 500 mm
Maximum glass height: 330 mm

Cycle duration: 180 "
Production baskets/hour: 20

Wash temperature: 0 °C - 65 °C
Rinse temperature: 0 °C - 90 °C
·Boiler capacity: 4.5 Lt
·Wash tank capacity: 26 Lt
·water consumption/cycle: 3 Lt

Electrical supply: 230 V / 50 Hz / 1 ~ (12.6 A)

Loading

·Pump: 370 W / 0.5 Hp
·Tank: 2500 W
·Boiler: 2800 W
·Total loading: 3170 W

External dimensions (WxDxH)

·Width: 600 mm
·Depth: 630 mm
·Height: 835 mm

Net weight: 58.5 Kg

DEFAULT EQUIPMENT

- Rinse aid doser.
- Variable detergent dosing equipment.
- Drain pump with non-return valve.
- 1 open basket.
- 1 mixed basket.
- 1 small cutlery basket.

OPTIONAL EQUIPMENT

- Drain pump with non-return valve.
- Stand.
- High feet kit 140-190mm.
- Stainless steel top-of tank filter set.