

Savant

Blue Seal Electric Combi Steamer SAVANT E40SBW 40 x 1/1 GN or 20 x 2/1 GN



- Manual controls
- Boiler system
- Multi-point core temperature probe
- High visibility display
- Two speed fan
- 90 preset recipe programs
- 99 free programs with 4 cycles, automatic sequence
- Multiprogram keypad for quick, "press and go" program selection with nine positions
- Electronic thermostat 30° - 300°C
- Auto-reversing fan rotation
- Autoclima with automatic vent
- Fast-Dry, quick dehumidification of the cooking chamber
- Built-in retractable hand shower with tap
- LM automatic cleaning system with separate container for CombiClean liquid detergent
- CALOUT descaling system that prevents formation and accumulation of limescale in the boiler, with built-in tank and automatic dispensing
- 4 LED's to indicate actual cooking cycle in programme mode
- ECOVAPOR - automatic control of the steam saturation in the cooking chamber
- ECOSPEED - oven optimises and controls the delivery of energy to maintain correct cooking temperature
- USB connection

GENERAL FEATURES

- INCOLOY 800 type heating elements
- AISI 304 fully insulated steam generator
- Automatic boiler pre-heating
- Daily automatic boiler draining and rinsing
- Stainless steel construction
- Perfectly smooth, water tight chamber
- Pivoting fan suction panel
- Front removable control panel for easy servicing
- Hygienic plug-in door seal for easy to remove day-to-day cleaning
- Adjustable door hinges
- Self draining door condensate drip tray
- Door with 3 locking points
- Halogen oven light
- Oven door handle mechanism allows either left or right operation
- Cool to touch door with double tempered glass with air chamber and interior heat-reflective glass
- Hinged inner glass for easy cleaning
- Constant self-diagnosis for error recognition
- IPX5 spray-proof and hose proof.
- Rack runners for GN loading

OPTIONAL FEATURES

- Right hinged door



ECOVAPOR



ECOSPEED



AUTOCLIMA



FAST DRY

Savant

Blue Seal Electric Combi Steamer SAVANT E40SBW 40 x 1/1 GN or 20 x 2/1 GN

Dimensions

| | |
|--------|--------|
| Width | 1290mm |
| Depth | 895mm |
| Height | 1810mm |
| Weight | 395kg |

Packed Dimensions

| | |
|--------|--------|
| Width | 1410mm |
| Depth | 1120mm |
| Height | 2060mm |
| Weight | 515kg |

Shelves

| | |
|----------------|------|
| 1/1 GN | 40 |
| 2/1 GN | 20 |
| Shelf Spacings | 63mm |

Installation requirements

(for precise installation instructions, please refer to the unit's installation manual).

Power connection requirements

Multi pole circuit breaker and all pole disconnection isolator switch installed near the appliance.

Supply line voltage

400-415V ~ 50Hz, 3P+N+E

Special voltage options available on request.

Power Connection

| | |
|--------------------------|------|
| Total (kW) | 61.8 |
| Convection power (kW) | 60 |
| Steam power (kW) | 60 |
| Rated Current (A) (400V) | 90 |

Installation clearances

| | |
|---------|--------|
| - rear | 25mm |
| - right | 500mm* |
| - left | 50mm |

*Clearance required on fixed installations for service accessibility.


If heat sources are located near the RH side of the Savant combi, ensure that a minimum distance of 400mm is maintained.

Install in accordance with local body regulations only on horizontal surfaces and not against combustible walls.


Water connection requirements

- cold water
- flow pressure (200-500kPa)
- soft water connection*
- shut-off valve with return flow inhibitor and dirt filter
- water supply R $\frac{3}{4}$
- R50 waste water connection

(*Water softener may be required. Please refer to installation manual for water treatment values.)

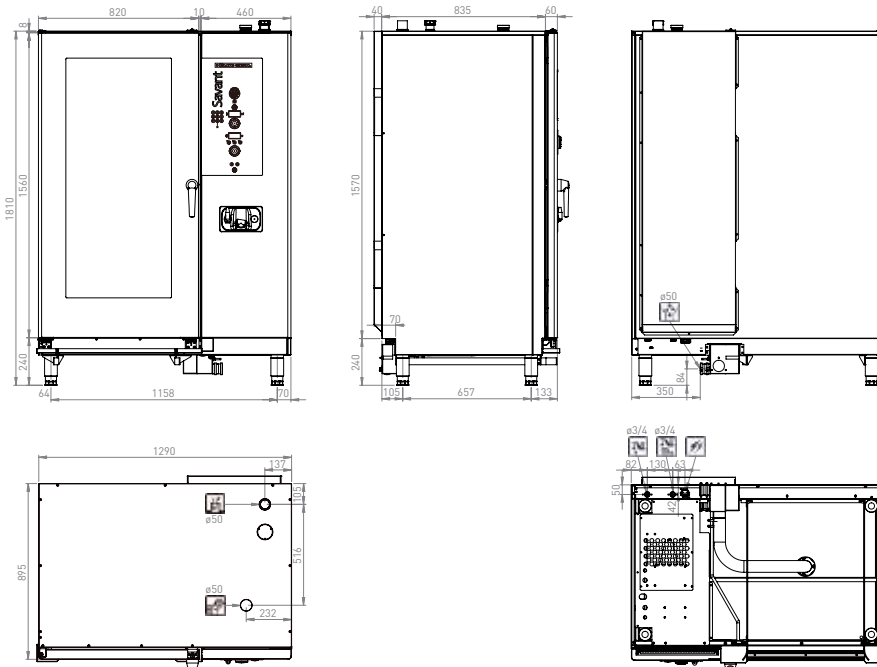

Distributor:
 KiD Catering Equipment
 Oaktree Court Business Centre
 Mill Lane, Ness
 Cheshire, CH64 8TP
 Tel: 0333 123 2450
sales@kidcateringequipment.com

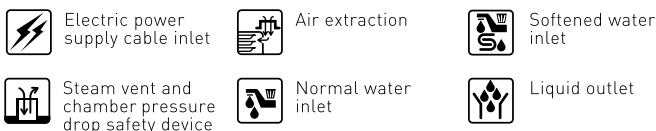

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd
 UK.BSS.S.1401

