

CN4

450mm Single Pan Gas Noodle Cooker



CN4

- High performance single pan noodle cooker
- Patented infra-red burner system
- Easy clean 316 grade stainless steel open pan
- 40L water capacity
- Integrated water fill and starch skimming water faucet
- Five stainless steel noodle baskets supplied
- Hinged basket drain stand
- Safety cut-out thermostat for empty pan/water boil out
- Stainless steel exterior
- Easy clean
- Easy service
- Fully modular

OVERALL CONSTRUCTION

- Pan 1.5mm 316 stainless steel
- Stainless steel front, sides and splashback
- Vitreous enamelled control panel
- Double skin door with stainless exterior
- 25mm (1") skimming overflow and pan drain valve
- 63mm dia. stainless steel adjustable legs to front and two rollers at rear
- Five 304 stainless steel baskets
- 304 stainless steel wire basket support grid in pan

CONTROLS

- Large easy to use knob - heat resistant reinforced
- Variable high boil to standby simmer burner control
- Fine adjustment water faucet for pan filling and water refreshing/starch skimming
- Pan protection safety cut-out thermostat
- Millivolt gas valve system (no electrical supply)
- Flame failure protection on pilot
- Piezo ignition to standing pilot burner

CLEANING AND SERVICING

- Open stainless steel pan for easy clean
- Hinged basket drain tray
- Removable basket support grid
- 25mm (1") drain valve for effective draining
- Easy clean stainless steel exterior
- Access to all parts from front of unit

Matching Products



CR9D



CR6C



CF2



CT9



C6D



C450



CT6



CS9 / C900-S




C6B



C300

CN4

450mm Single Pan Gas Noodle Cooker

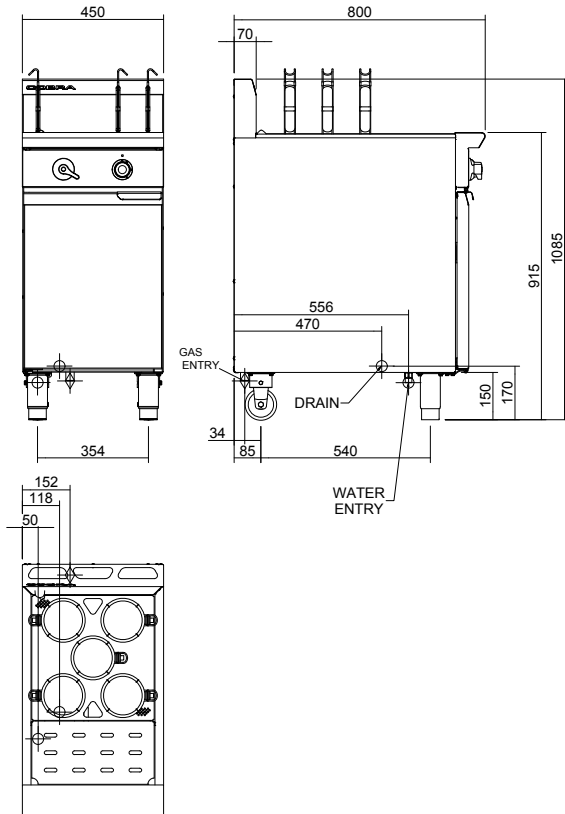

CN4

SPECIFICATIONS

Pan size
 Water capacity 40L
 Width 365mm
 Length 405mm
 Basket immersion depth 130mm

Baskets
 5 stainless steel baskets
 dia 140mm x 150mm deep
 Stainless steel basket support tray

Burners
 1 x infra-red burner

Gas power
 Natural gas
 12.0kW (nett), 45,450 Btu/hr (gross)
 Propane gas
 12.5kW (nett), 46,350 Btu/hr (gross)

Gas flow rate
 Natural gas 1.27m³/hr
 Propane gas 0.97kg/hr

Gas connection
 R 3/4 (BSP) male
 50mm from left hand side,
 34mm from rear and 140mm from floor

Water connection
 Cold water connection 50mm from left hand side, 556mm from rear and 140mm from floor
 R1/2 (BSP) male

Drain connection
 Drain must be connected to system suitable for boiling water discharge 1" BSP Male connection 118mm from left hand side, 470mm from rear, and 170mm from floor

Dimensions
 Width 450mm
 Depth 800mm
 Height 915mm
 Incl. splashback 1085mm
 Nett weight 78kg

Packing data
 0.587m³, 95.5kg
 Width 900mm
 Depth 520mm
 Height 1255mm

Gas types
 Available in Natural gas and LP gas, please specify when ordering
 Other gas types on request

Options
 Side splash guards
 Joining caps

KiD Catering Equipment
 Oaktree Court Business Centre
 Mill Lane, Ness, Cheshire, CH64 8TP

Tel: 0333 123 2450

sales@kidcateringequipment.com

www.kidcateringequipment.com



ISO9001
 Quality Management Standard

Designed and manufactured by



ISO9001

All Cobra products are designed and manufactured by Moffat using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.



© Copyright Moffat Ltd
 UK.C.01.19 / 1622

an Ali Group Company



The Spirit of Excellence