

| Product Name | Counter-Top Single Hob Cooktop | Quantity | | Item # | |
|--------------|--------------------------------|----------|--|--------|--|
|--------------|--------------------------------|----------|--|--------|--|



Note: Induction cooking requires the use of induction compatible (i.e. magnetic) pots and pans.



Standard Features

- Portable tabletop design with stainless steel housing, heavy duty, electronic components, and high impact, thick, glass-ceramic top engineered for use in commercial kitchens
- Control knob for ease of use and automatic power or temperature control
- Temperature control allows for 27 precise temperature settings and 20 power cook settings
- Pan Maximizer feature achieves maximum heating of any induction compatible pan
- Microprocessor monitors vital components 120 times per second to check for overheating, power supply problems, and more. Cooktop shuts off and displays error codes enabling user to diagnose and correct minor problems
- LED display for precise user feedback
- Automatic pan detection allows for instant energy transmission to pan and almost no energy consumption when pan is not present
- Automatic shut-off feature prohibits overheating
- Integral grease filter and air baffle to ensure cleaner and cooler air intake
- Sloped front panel allows for easy viewing and operation
- Easy to clean glass-ceramic top surface
- Integral cooling fan keeps internal electronics cool
- Available in 2500, 3000, and 3500 watts (208-240VAC)

- One year limited warranty
- Made in the USA

Specifications

Shall be a CookTek counter-top induction cooktop, model _____ with a total kW rating of _____.

Unit shall be manufactured in the United States and constructed of a stainless steel housing and a high impact glass-ceramic top.

Unit shall be equipped with a built-in microprocessor that performs precise temperature control, auto shut-off to prevent overheating, self-diagnostics and a pan maximizer feature that ensures maximum heating of any induction compatible pan.

Unit shall have adjustable electronic control with 20 power cook settings and 27 precise temperature settings.

Unit shall operate on _____ power with integral _____ cord and plug (supplied).

www.kidcateringequipment.com



sales@kidcateringequipment.com

Tel: 0333 123 2450

www.kidcateringequipment.com

sales@kidcateringequipment.com

Tel: 0333 123 2450

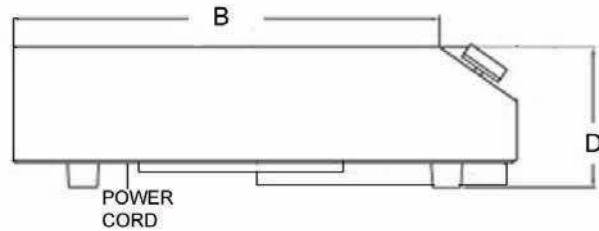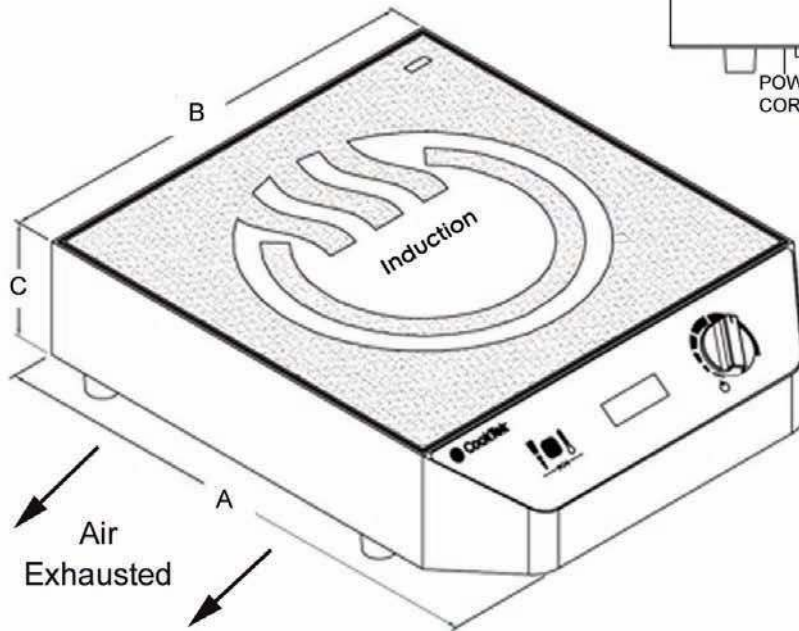

| Dimensions | | |
|------------|--------|-----|
| | inches | mm |
| A | 16.31 | 414 |
| B | 13.81 | 350 |
| C | 3.73 | 94 |
| D | 4.98 | 126 |

- Dedicated circuit required
- Requires maximum (do not exceed) ambient temperature of 50°C/122°F
- Cooling clearance: 2" (55mm) for front, sides, and rear



Specifications

| Model Number | MC2500 | MC3000 | MC3500 |
|--------------------------|-------------------------|-------------------------|-------------------------|
| Power Requirements | 208-240VAC, 1 Ph | 208-240VAC, 1 Ph | 208-240VAC, 1 Ph |
| Power Consumption | 2500W (max rating) | 3000W (max rating) | 3500W (max rating) |
| BTU Comparison | 22,000 BTU | 26,000 BTU | 31,000 BTU |
| Voltage | 208-240VAC, 50/60 Hz | 208-240VAC, 50/60 Hz | 208-240VAC, 50/60 Hz |
| Amperage | 11A (max) | 13A (max) | 17A (max) |
| Power Range | 100-2500W | 100-3000W | 100-3500W |
| Temperature Range | 85-500°F / 30-260°C | 85-500°F / 30-260°C | 85-500°F / 30-260°C |
| Dimensions (in) | 16.31" x 13.81" x 4.98" | 16.31" x 13.81" x 4.98" | 16.31" x 13.81" x 4.98" |
| Dimensions (mm) | 414 x 350 x 126 | 414 x 350 x 126 | 414 x 350 x 126 |
| Weight | 19 lbs / 8.6 kg | 19 lbs / 8.6 kg | 19 lbs / 8.6 kg |
| Packaged Weight | 24 lbs / 10.4 kg | 24 lbs / 10.4 kg | 24 lbs / 10.4 kg |
| Packaged Dimensions (in) | 20.75" x 18.75" x 9" | 20.75" x 18.75" x 9" | 20.75" x 18.75" x 9" |
| Packaged Dimensions (mm) | 527 x 476 x 229 | 527 x 476 x 229 | 527 x 476 x 229 |
| Power Cord Length | 6 ft / 1.8 m | 6 ft / 1.8 m | 6 ft / 1.8 m |
| Plug Type | Country Specific | Country Specific | Country Specific |