



# Product Code: EP700H 41-102

## Single door refrigerator cabinet

---



The EcoPro G3 range of cabinets offers a combination of cutting-edge refrigeration technology, low running costs and reliability, making them the first choice for the foodservice professional.

### Features & Benefits

---

- Foster Shield provides advanced temperature control and hygienic design, protecting from the dangers of unsafe food storage. With air distribution optimised by CFD design technology, efficient operation is assured, even when shelves are fully loaded
- With PureControl, the G3's controller display uses pure LEDs, incorporating InGaN technology, which means it achieves higher resolution, lasts longer - all while using less power. Through the simple addition of a gateway, you're connectivity-ready
- Fitted with our new and improved +stayclear condenser which helps increase product life and reduce energy consumption, +stayclear helps your low energy fridge stay a low energy fridge. Now fitted across the cabinet and counter range as standard
- Market leading usable capacity, now supplied with 4 shelves as standard making your money go further – holds more than a conventional fridge
- High quality 304 stainless steel is used as standard on all doors and unit covers for G3 – the gold standard in performance stainless steel – meaning the heaviest usage touchpoints on the product are covered
- Operates efficiently in ambient temperatures of up to 43°C

**Distributor:**

KiD Catering Equipment, Oaktree Court Business Centre, Mill Lane, Ness, Cheshire, CH64 8TP  
Tel: 0333 123 2450 [sales@kidcateringequipment.com](mailto:sales@kidcateringequipment.com)

## Shelving

<b>Extra heavy duty shelving</b>	Option
<b>4 shelves (GN2/1)</b>	Standard

## Refrigeration

<b>R290 - Energy Efficient</b>	Standard
<b>Integral Refrigeration System</b>	Standard
<b>Less Condensing Unit</b>	Option

## Specification

<b>Gross volume (ltrs)</b>	600
<b>Refrigerator +1/+4°C</b>	Standard
<b>Width (mm)</b>	700
<b>Depth (mm)</b>	855
<b>Height (mm)</b>	2080

## Base Fittings

<b>Castors 80mm</b>	Standard
<b>Legs 150mm</b>	Option

## Electrical & Service Data

<b>230/50/1</b>	Standard
<b>220/60/1 Electrical Supply</b>	Option
<b>Fuse Required (A)</b>	10

## Finish

<b>s/steel ext, 304 s/s door &amp; alu int</b>	Standard
<b>304 S/S back for island sitting</b>	Option

## Doors

<b>Solid</b>	Standard
<b>Left Hand Hinged Door</b>	Option

## Product Extras

<b>Helicoil Mains Lead</b>	Option
----------------------------	--------

## Energy

<b>AEC</b>	332
<b>Nett Volume</b>	479.9
<b>Energy Grade</b>	A
<b>Energy Efficiency Index</b>	23.77



## Footnotes

- Castors not available if product supplied less condensing unit
- Adequate airflow and service space must be kept above the top of cabinet: 100mm
- Depth with door open is 1500mm

### Distributor:

KiD Catering Equipment, Oaktree Court Business Centre, Mill Lane, Ness, Cheshire, CH64 8TP  
Tel: 0333 123 2450 [sales@kidcateringequipment.com](mailto:sales@kidcateringequipment.com)

# Energy Performance Data and information

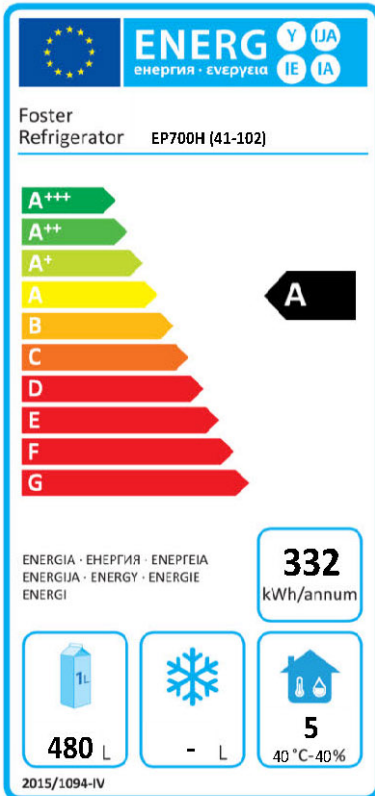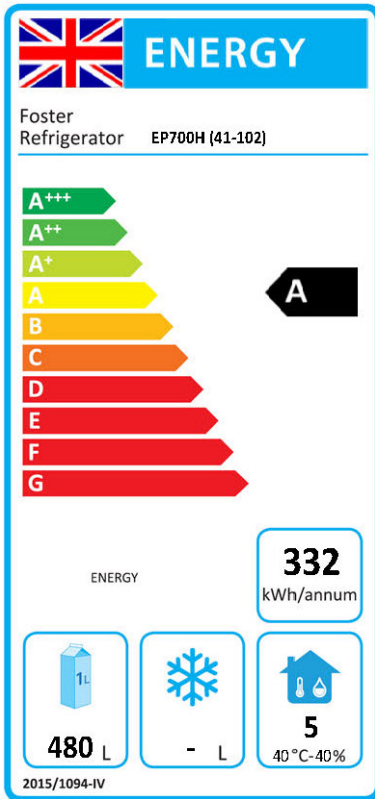

## Application

This appliance is intended for use in ambient temperatures up to 40°C

## Safety

Precautionary instructions and maintenance advice, to ensure efficient operation, can be found in this products operating instructions.



The Refrigeration Experts

## Distributor:

KiD Catering Equipment, Oaktree Court Business Centre, Mill Lane, Ness, Cheshire, CH64 8TP  
Tel: 0333 123 2450  
sales@kidcateringequipment.com

All images shown are for illustration purpose only. All images and photographs are not intended to be relied upon for, nor to form part of, any contract unless specifically incorporated in writing into the contract. Solely the dimensions and specifications incorporated in the quotation or purchase order confirmation shall be contractually binding.