



Evolution | pass through + heat recovery



Supplier:
KiD Catering Equipment
 Oaktree Court Business Centre
 Mill Lane, Ness Cheshire, CH64 8TP
 Tel: 0333 123 2450
 sales@kidcateringequipment.com

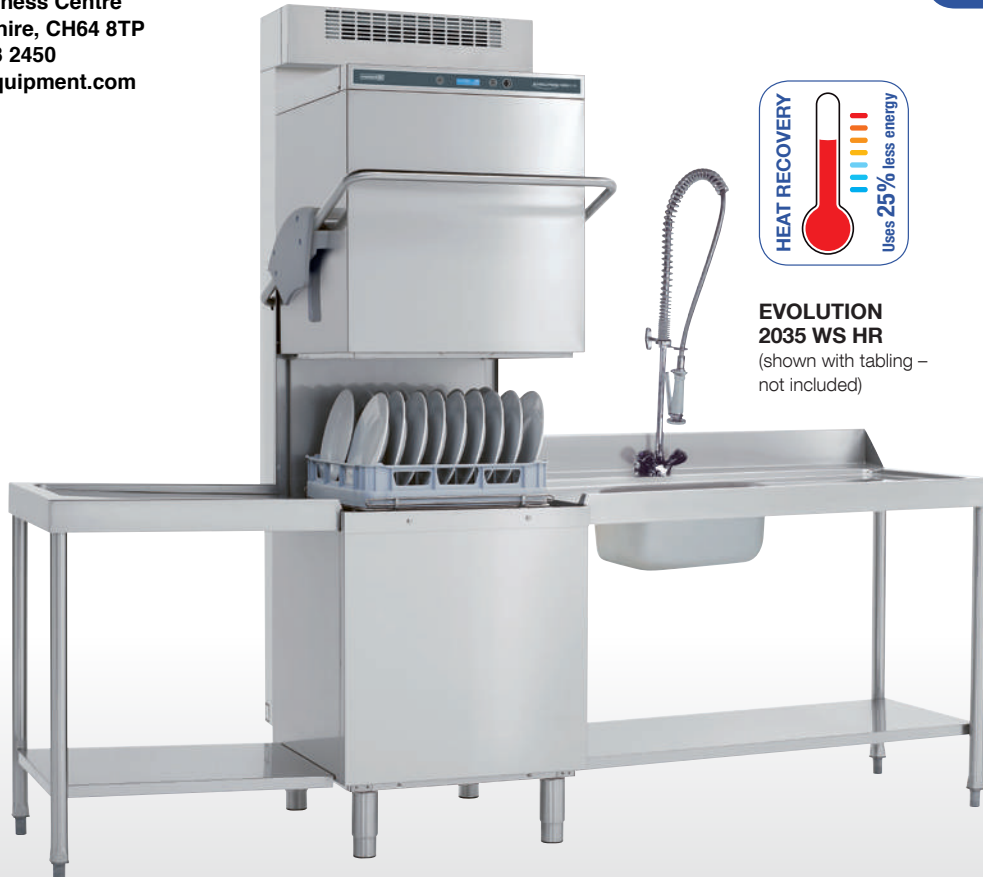

**EVOLUTION
 2035 WS HR**
 (shown with tabling –
 not included)

- 2 year warranty
- **HEAT RECOVERY**
- **Up to 25% less power required to heat rinse water**
- **HR module supplied separately with simple bolt on instructions**
- Reduces need for extraction hood and improves working environment
- **Internal continuous water softener**
- Super glide hood for ease of use
- Full LCD display and user interface giving uncomplicated machine status updates
- Detergent and rinse aid delivery by precise peristaltic pumps
- Priming and dosing of chemicals enabled from fascia controls
- Breaktank type AA
- Accurate detergent and rinse aid peristaltic dosing as standard
- Drain pump fitted as standard
- Patented DUAL flow wash pump, reduced power while retaining wash efficiency
- Three selectable cycle options plus special application cycles options
- Cycle times can be tailored to site requirements
- GLASS cycle automatically changes parameters to suit glass washing
- SANITISING cycle balances wash time and temperatures to achieve a standard rating of AO 30
- LONG cycle for intensive wash or for glass renovation
- GREEN cycle for economy, reduces water consumption and operates with lower temperatures
- ACT extremely intensive cycle for the dirtiest products by running two complete cycles

- Selectable energy saving mode
- Selectable thermostop ensures optimum rinse temperatures
- Comprehensive automatic self-cleaning cycle
- Surface scrap tray filters
- Operational self-diagnostics
- Supplied with one pegged plate, one open rack and cutlery basket

Technical

- Standard voltage 240V – single phase (can be supplied for 3 phase)
- Suitable for cold* water supply only at 2 to 4 bar dynamic supply pressure. Cannot be used with hot water supply.
- Wash temperature 60°C (adjustable)
- Rinse temperature 78°C (adjustable)

Drain pump versions require a waste up-stand for correct operation.

Restrictive waste connections should be avoided for all installations.

*Machines fitted to cold water supplies will not be capable of running repeated short cycles, the cycle time will automatically be extended to allow recovery of correct operating temperatures.

Model	Rack size mm	Useable Height mm	Dimensions mm W x D x H	Standard Cycle Options	Power kW	Amps Required
Evolution 2035 WS HR	500	440	640 x 755 x 2235#	3 Cycles	4.7/6.7	20/30##

Height adjustable from 2235 to 2295mm.

Machines will be supplied for 30 amp supply as standard, if 20 amp required specify at time of order.