

# C Range

## undercounter

### TRAY/DISHWASHER



## C615 ws

### Maidaid C615 WS Features

- 2 year warranty
- Four button bright LED display with soft touch controls, twin traffic lights giving constant status updates & operational self diagnostics



- Alarms menu with hi-level information retrieval
- Quick release triple wash & rinse arm design
- Stainless steel surface scrap tray filters supplied as standard
- Automatic continuous internal water softener
- Drain pump and breaktank as standard
- Substantial usable height of 375mm to cater for large washware
- Three standard cycle time options with further options available
- Cycle times can be tailored to site requirements
- Automatic self-cleaning at end of service
- Selectable energy saving mode
- Selectable thermostop ensures optimum rinse temperatures
- Patented dual flow wash pump - reducing power consumption whilst retaining wash efficiency
- Moulded wash tank for easy cleaning
- Moulded rack guide giving partial double skin
- Accurate detergent & rinse aid peristaltic dosing pumps as standard
- Compatible with 500 x 500 racks



Supplied with one 500 x 600 pegged rack & one 500 x 500 open rack.

Additional racks can be purchased



**Distributor:**  
**KiD Catering Equipment, Oaktree Court Business Centre, Mill Lane, Ness, Cheshire, CH64 8TP**  
**Tel: 0333 123 2450**  
**sales@kidcateringequipment.com**

# C Range undercounter TRAY/DISHWASHER

## C615 ws



### Technical Data

|                          |         |                           |
|--------------------------|---------|---------------------------|
| Dimensions (W x D x H)   | mm      | 580 x 700 x 840<br>+ Feet |
| Feet height              | mm      | 10-20                     |
| Rack size                | mm      | 500 x 600                 |
| Maximum useable height   | mm      | 375                       |
| Door opening             | mm      | 405                       |
| Theoretical productivity | Racks/h | 40                        |
| Effective productivity   | Racks/h | 30*                       |


|                   |    |      |
|-------------------|----|------|
| Wash tank element | kW | 2.1  |
| Boiler element    | kW | 6    |
| Wash pump         | kW | 0.61 |
| Tank capacity     | L  | 23   |
| Noise emission    | dB | ≤ 55 |

### Packaging Specs

|                  |    |                  |
|------------------|----|------------------|
| Gross weight     | Kg | 69               |
| Cubic volume     | m³ | 0.45             |
| Dim. (W x D x H) | mm | 670 x 780 x 1000 |

\*Allowing 30 seconds for reloading  
Cycle times may vary depending on local conditions/services

### Installation Diagram – All services must be within 1 meter

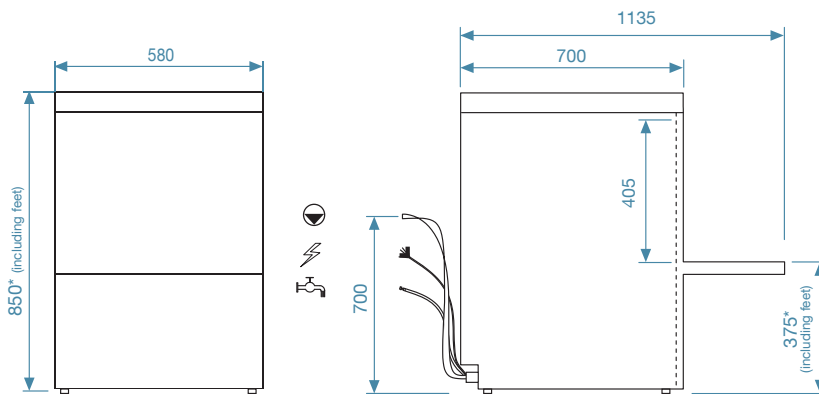

\*Height-adjustable feet + 10mm

### Power Supply

|                         |                  |     |
|-------------------------|------------------|-----|
| Installed power         | AMP              | kW  |
| 230V – 50Hz – 1N        | 13               | 2.8 |
|                         | 20               | 4.7 |
|                         | 30*              | 6.7 |
| Optional 3 Phase config | Total load 6.7kW |     |
| Fused                   | 16 amp           |     |

\*Standard configuration

**Pumped waste into upstand, maximum height 700mm**

**Power**  
 **Water supply 2 – 4 bar**

### Water Connection

|                      |       |               |
|----------------------|-------|---------------|
| Inlet water pressure | Bar   | 2 to 4        |
| Flow rate L/Min      | L/Min | 6             |
| Water inlet temp     | °C    | 10 to 50      |
| Water connection     | BSP   | ¾"            |
| Waste connection     | Ø     | Int 19/ext 24 |

### Cycle Information

|                             |     |                         |
|-----------------------------|-----|-------------------------|
| Number of standard cycles   |     | 3                       |
| Standard cycles times       | Sec | 90/120/150 – adjustable |
| Special cycle               |     | Eco, Glass, Long        |
| Self-cleaning cycle         |     | Full self clean         |
| Water consumption per cycle | L   | 2.5                     |
| Wash temperature            | °C  | 60 – adjustable         |
| Rinse temperature           | °C  | 82 – adjustable         |

#### Distributor:

**KiD Catering Equipment, Oaktree Court Business Centre, Mill Lane, Ness, Cheshire, CH64 8TP**  
Tel: 0333 123 2450 sales@kidcateringequipment.com