

D Range

pass through

DISHWASHER



D2121

Maidaid **D2121** Features

- **2 year warranty**
 - Four button bright LED display with soft touch controls, twin traffic lights giving instant status updates & operational self-diagnostics
- 
- Alarms menu with hi-level information retrieval
 - Quick release parallel wash & rinse arm design
 - Triple wash tank filtration system
 - Breaktank as standard
 - Drain pump as standard
 - Three standard cycle time options with a range of special cycles
 - Cycle times can be tailored to site requirements
 - Comprehensive automatic self-cleaning at end of service
 - Selectable energy saving mode
 - Selectable thermostop ensure optimum rinse temperatures
 - Fully double skinned body construction with single skinned hood
 - Patented dual flow wash pump - reducing power consumption whilst retaining wash efficiency
 - Moulded wash tank for easy cleaning
 - Surface scrap tray filters supplied as standard
 - Accurate detergent & rinse aid peristaltic dosing pumps as standard



D2121
(shown with tabling
– not included)

Supplied with one pegged (capable of holding 18 10" plates), one open rack (capable of holding 25 pint glasses) and cutlery insert.

Additional racks can be purchased |



Distributor:

KiD Catering Equipment, Oaktree Court Business Centre, Mill Lane, Ness, Cheshire, CH64 8TP
Tel: 0333 123 2450

sales@kidcateringequipment.com

D Range

pass through

DISHWASHER

D2121



D2121
(shown with tabling –
not included)

Technical Data

Dimensions (W x D x H)	mm	640 x 755 x 1370 + Feet	Wash tank element	kW	2.5
Feet height	mm	165-225	Boiler element	kW	6
Rack size	mm	500 x 500	Wash pump	kW	0.7
Maximum useable height	mm	440	Tank capacity	L	22
Door opening	mm	460	Noise emission	dB	≤ 65
Theoretical productivity	Racks/h	51			
Effective productivity	Racks/h	36*			

*Allowing 30 seconds for reloading

Packaging Specs

Gross weight	Kg	116
Cubic volume	m ³	1.02
Dim. (W x D x H)	mm	870 x 760 x 1540

Power Supply

Installed power	AMP	kW
230V – 50Hz – 1N	20	4.7
	30*	6.7
Optional 3 Phase config	Total load 6.7kW	
Fused	16 amp	

*Standard configuration

Water Connection


Inlet water pressure	Bar	2 to 4
Flow rate L/Min	L/Min	6
Water inlet temp	°C	10 to 50
Water connection	BSP	¾"
Waste connection	Ø	Int 29/ext 34

Cycle Information

Number of standard cycles		3
Standard cycles times	Sec	70/90/180
Special cycle		Eco, Glass, Long, Refresh
Self-cleaning cycle		Full self clean
Water consumption per cycle	L	2
Wash temperature	°C	60 – adjustable
Rinse temperature	°C	82 – adjustable

Installation Diagram –

All services must be within 1 meter

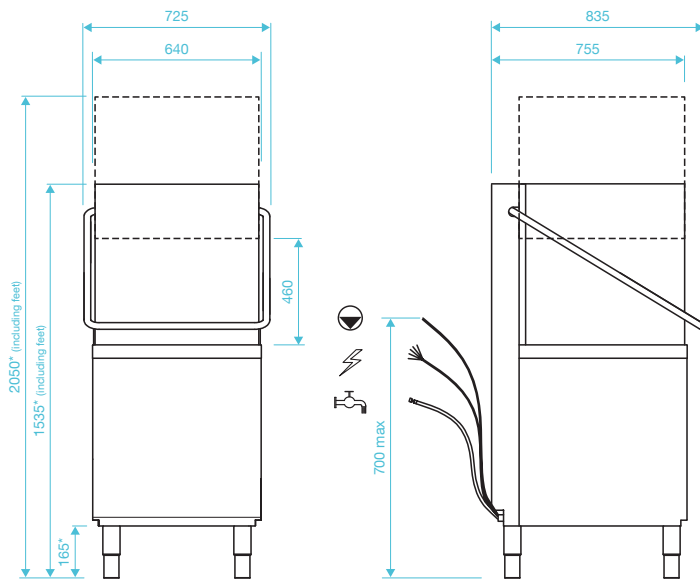

*Height-adjustable feet + 60mm

- Pumped waste into upstand, maximum height 700mm
- Power
- Water supply 2 – 4 bar

Distributor:

KiD Catering Equipment, Oaktree Court Business Centre, Mill Lane, Ness, Cheshire, CH64 8TP
Tel: 0333 123 2450
sales@kidcateringequipment.com