HWU211 (Glass Doors)

Precision's durable all stainless steel GN1/1 wall cabinets have been designed to provide commercial caterers with reliable, energy and cost efficient refrigerated storage solutions when space is at a premium.

Proudly made in the UK, these wall cabinets provide practical and accessible refrigerated storage right where it's needed.

Heavy duty wall mounting kit is provided, however, the wall and fixings must be capable of carrying the fully loaded cabinet.

**Key Features:**

- Stainless Steel Interior & Exterior
- Front Breathing & Venting Refrigeration System
- Designed To Operate In 43ºC Ambient
- Centrally Positioned Evaporator Between Doors
- R134a Refrigerant
- Zero ODP Injected Polyurethane Insulation - 60mm
- +1 / 4ºC Refrigerator Temperature Range
- Electronic Controller With Easy Read LCD Screen
- Automatic Off Cycle Defrost
- Rifle Bore Coated Evaporators
- Condensing Unit Safety System To Protect Compressor From Blocked Condensers
- Integrated Flush Door Handle
- Gastronorm GN1/1 Shelving System - Anti Tilt Slides
- Hi / Lo Audio Visual Temperature Alarms
- Wall Mounting Kit Provided
- Self Closing Doors
- Waste Heat Recovery Condensate Vaporiser System

HWU211

**Options:**

- Glass Doors & Interior Light
- Door Locks
- Extra Std Nylon Coated Shelves / Slides - GN1/1
- Right Hand Hinged Door (HWU111)
- Floor Mount Model - On Levelling Feet +25mm
- Precision Connect

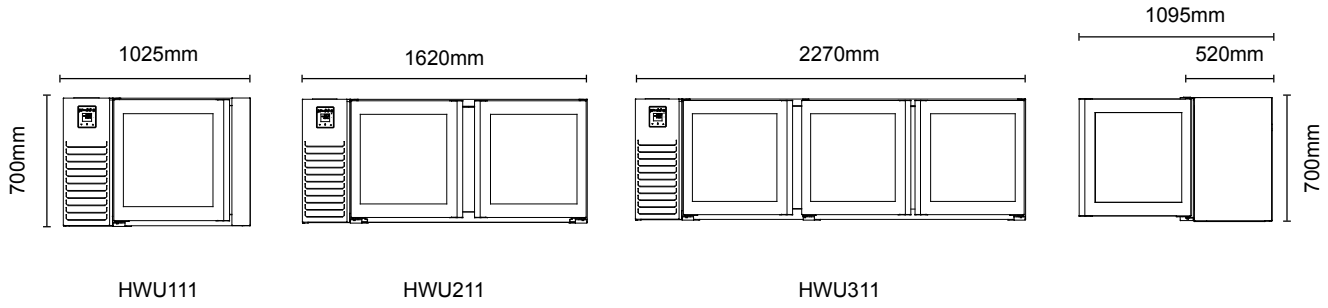


HWU111 HWU211 HWU311

| Model | HWU111 | HWU211 | HWU311 |
|---|---|---|---|
| Type | Refrigerator | Refrigerator | Refrigerator |
| Material | ST/ST Int/Ext | ST/ST Int/Ext | ST/ST Int/Ext |
| Shelf Size | GN1/1 | GN1/1 | GN1/1 |
| Number of Shelves | 2 | 4 | 6 |
| Max Number of Shelves (50mm Spacing) | 9 | 18 | 27 |
| Temperature Range | +1 / 4ºC | +1 / 4ºC | +1 / 4ºC |
| Exterior WxDxH (mm) | 1025x520x700 | 1620x520x700 | 2270x520x700 |
| Net Usable Volume (litres) | 67.9 | 135.8 | 203.7 |
| Weight (KG) | 80 | 110 | 140 |
| Refrigerant / GWP | R134a / 1430 | R134a / 1430 | R134a / 1430 |
| Refrigeration Watts (+45ºC Condensing) | 452 | 452 | 452 |
| Evaporating Temp | -8ºC | -8ºC | -8ºC |
| Heat Rejection Watts* | 728 | 728 | 740 |
| Noise Output (dBa) | 68 | 68 | 71 |
| Power | 230 / 50 / 1 | 230 / 50 / 1 | 230 / 50 / 1 |
| Running Amps | 1.9 | 1.9 | 1.9 |
| Total Electrical Load - kW | 0.44 | 0.44 | 0.44 |
| Energy Consumption / 24hrs - kWh** | 1.38 | 2.18 | 4.65 |
| Energy Consumption / Year (AEC) - kWh** | 504 | 796 | 1697 |
| Energy Efficiency Class** | B | C | D |

* Heat Rejection is taken at the listed evaporating and condensing condition. Watts is calculated by taking the total power of the cabinet.
** Tested to EN16825
We are constantly innovating and improving our products. Please always check our website for the most up-to-date version of this spec sheet

Distributor:
KiD Catering Equipment, Oaktree Court Business Centre, Mill Lane, Ness, Cheshire, CH64 8TP
Tel: 0333 123 2450 sales@kidcateringequipment.com

© 2021 v1 - We reserve the right to change specifications without prior notice