

# MENUMASTER<sup>®</sup> Commercial

Project #: \_\_\_\_\_

Item #: \_\_\_\_\_



Model RFS518TS shown

## Medium Volume

### Menumaster Commercial Microwave Model RFS518TS

#### Power Output

- 1800 watts of power.
- Five power levels for consistent, delicious results for frozen, refrigerated and fresh foods - from the freezer to table in minutes.

#### Easy to Use

- Up to 100 programmable menu items simplifies cooking and ensures consistent results.
- Four stage cooking option for easy one-touch cooking.
- Multiple quantity pad calculates the proper cooking times for multiple portions.
- User friendly touch controls are easy to use.
- Time entry option for added flexibility.
- Digital display with countdown timer for simple operation and "at-a-glance" monitoring.
- Braille touch pads.
- See-through door and lighted interior for monitoring without opening the door.
- 34 Liter (1.2 cubic ft.) capacity accommodates a 356 mm (14") platter, prepackaged foods and single servings.
- Stackable to save valuable counter space.

#### Easy to Maintain

- Stainless steel exterior and interior for easy cleaning and a professional look.
- Removable air filter protects oven components.
- Constructed to withstand the foodservice environment.
- Limited 3 year warranty.
- ETL Listed.

### Medium Volume This category of microwave is ideal for...

#### Applications:

- Pizza restaurants
- Casual dining
- Clubs
- Deli

#### Defrost:


- Defrosts most frozen food products



All ACP, Inc. commercial ovens are backed by our Culinary Center. Call us with any question regarding food preparation, menu development and cooking times. 866-426-2621.



# Menumaster Commercial Microwave Model RFS518TS | Medium Volume

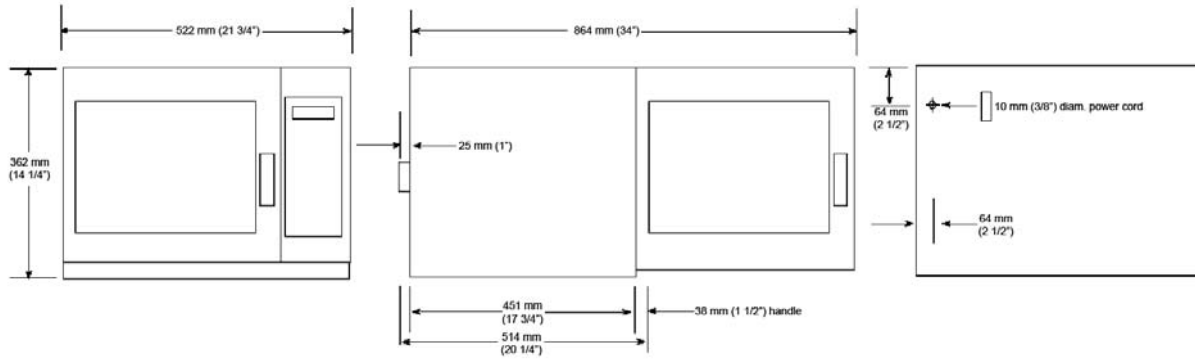

Installation clearance: 2" sides & 12" top

Specification #:

## Specifications

Model	RFS518TS	UPC Code 728028043181
Configuration	Countertop	
Control System	Touch	
Programmable Control	10 pads	
Settings Programmable	100	
Max. Cooking Time	60:00	
Power Levels	5	
Defrost	Yes	
Time Entry Option	Yes	
Microwave Distribution	Rotating antenna, top & bottom	
Magnetron(s)	2	
Display	LED	
Stackable	Yes	
Stage Cooking	Yes, 4	
Interior Light	Yes	
Door Handle	Pull Handle	
Signal	End of cycle, adjustable	
Air Filter	Removable with cleaning reminder	
Multiple Portion Setting	Yes, X2	
Exterior Dimensions	H 362 (14 1/4")	W 552 (21 3/4") D*514 (20 1/4")
Cavity Dimensions	H 226 (9")	W 362 (14 1/4") D 416 (16 3/8")
Door Depth	864 (34"), 90°+ door open	
Usable Cavity Space	34 Liters (1.2 cubic ft.)	
Exterior Finish	Stainless steel	
Interior Finish	Stainless steel	
Power Consumption	2700 W, 12 A	
Power Output**	1800 W** Microwave	
Power Source	230V, 50 Hz, 16 A single phase	
Plug Configuration / Cord	CEE 7/7 "Schuko" 1.5 m (5 ft.)	
Frequency	2450 MHz	
Product Weight	29 kg. (64 lbs.)	
Ship weight (approx.)	32 kg. (71 lbs.)	
Shipping Carton Size	H 580 (22 3/4")	W 654 (25 3/4") D 464 (18 1/2")

## Specifications

Commercial microwave 10 touch pad control panel shall be programmable with the ability to program up to 100 menu items with two multiple portions. Touch pad shall include Braille for ADA compliance. Cooking timer shall be 60 minute, countdown style with a time entry option and an adjustable end of cycle audible signal. LED display shall be a backlit. There shall be 5 power levels, including defrost and 4 cooking stages. Microwave output shall be 1800 watts distributed by two magnetrons with a rotating top & bottom antenna to provide superior even heating throughout the cavity. Durable door shall have a tempered glass window and a grab and go handle with a 90°+ opening for easy access. An interior light shall facilitate monitoring without opening the door. The large 34 Liter (1.2 cubic ft.) cavity shall accommodate a 356 mm (14") platter. Interior ceramic shelf shall be sealed and recessed on oven bottom to reduce plate-to-shelf edge impact. Oven shall have a stainless steel interior and exterior and be stackable to save counter and shelf space. Front air filter shall be removable and have a clean filter reminder. Microwave oven shall comply with standards set by the U.S Department of Health and Human Services, ETL listed.



**Intertek** **Intertek**

## Warranty

Limited 3 year warranty:  
 Year 1 - parts, labor, and travel are covered.  
 Years 2 - 3 - magnetron tube (part only) is covered.

AIA File #:

Measurements are in millimeters

\* Includes handle

\*\* IEC 60705 Tested

