



Induced Energy

CS3000QT 3KW x 4 Table Top Quad




Product Specification

Maximum Power	14KW	(3 phase requires 32 amps per phase)
Electrical Supply	CS3000QT	415V AC 50Hz 32-amp 3-phase + N&E
	CS3000QT-1	2 x 32amp single phase
Cord & Plug	Cord length 1.8m QT - 5-pin 32-amp Commando plug fitted (UK) QT-1 – 2 x 32-amp single phase, fitted Appropriate plug for each export market	
Weight	60kg	
Dimensions (mm)	780 x 673 x 890mm	
Construction	Ceran top, stainless steel casing	
Depth of Field	Up to 30mm	
Safety Features	Pan detection; boil-dry protection; overheat prevention; clean filter warning	
User Interface	Display panel: Clean filter warning; No Pan Present warning; Glass hot warning; Shutdown	
Controls	4 x Ergonomically designed knobs with precise settings of 1 through 99	
Installation	Installation instructions provided	
Cooling Clearance	Model CS3000QB draws air from behind and below the housing unit	
Bespoke Options	Ceran top design - minimum quantity 50	
Warranty	2 years parts and labour, excluding case, Ceran top	
CE	Approved	


Induced Energy Limited operates a continuous programme of product development and improvement.
.Product specifications may therefore be subject to change.

Distributor:
KiD Catering Equipment
Oaktree Court Business Centre
Mill Lane, Ness, Cheshire, CH64 8TP
Tel: 0333 123 2450
sales@kidcateringequipment.com


Plan View

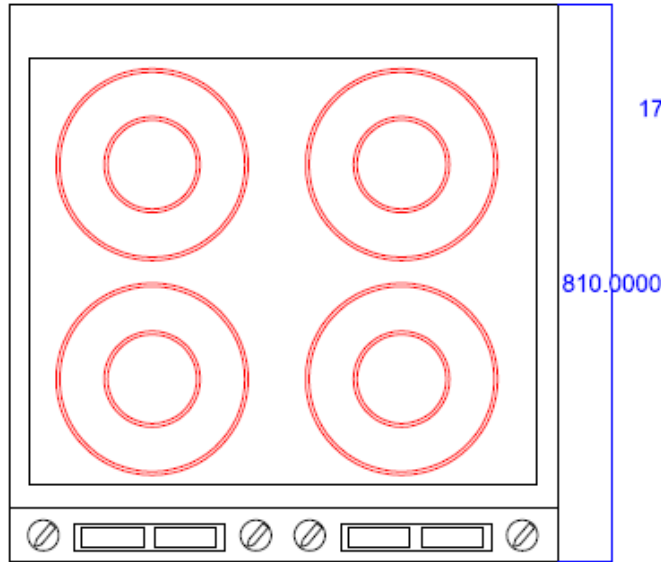

Side View



Front View

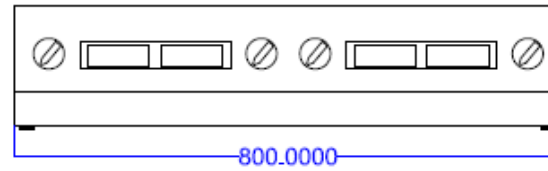

GENERAL NOTES
 - ALL DIMENSIONS WORK AND SPECIFIC DIMENSIONS BY OTHER UNLESS OTHERWISE STATED OTHERWISE
 - ALL DIMENSIONS SHOWN ARE FOR DELIVERED EQUIPMENT UNLESS OTHERWISE STATED OTHERWISE
 - ADDITIONAL GENERAL USE SOCKETS FOR CLEANING EQUIPMENT TO CONTACT WITH DIMENSIONS OF 100MM TO 150MM TO BE PROVIDED TO THE USER
 - IT IS THE RESPONSIBILITY OF THE CLIENT OR THE CONTRACTOR TO PROVIDE TO THE USER THAT ALL WORKS ARE COMPLETED TO THE REQUIREMENTS OF THE CLIENT AND TO MEET ALL NECESSARY LOCAL, NATIONAL AND INTERNATIONAL REGULATIONS AND MEET ALL NECESSARY LOCAL, NATIONAL AND INTERNATIONAL APPROVALS INCLUDING ENVIRONMENTAL, HEALTH, PLANNING AND FIRE CERTIFICATES.

Power Options

- Model CS3000QT 3 Phase N+E total load 14Kw Red commando plug supplied fitted with 1.8 metre cable
Please note that due to the way this unit is wired internally, each of the phases must be rated at 32 amps
- Model CS3000QT-1 2 x 32 amp (7Kw each) single phase 2 x blue commando plugs fitted with 1.8 metre cable

The Magic of Induced Energy

Induced Energy Ltd
 Westminster Road Brackley
 Northants NN13 7EB
 Tel: 01290 705900
 Email: sales@inducedenergy.com
 Web: www.inducedenergy.com

Model No	CS3000QT
Date Revised	December 2016
Approved By	Nfc Banner
Signature	

Distributor:
 KiD Catering Equipment
 Oaktree Court Business Centre
 Mill Lane, Ness, Cheshire, CH64 8TP
 Tel: 0333 123 2450
 sales@kidcateringequipment.com